



Installation instructions for the BLU Magnetic backdraught damper


The Magnetic BLU backdraught damper is designed for installation in round ventilation systems and in ducts discharging air from kitchen hoods in multi-family buildings.

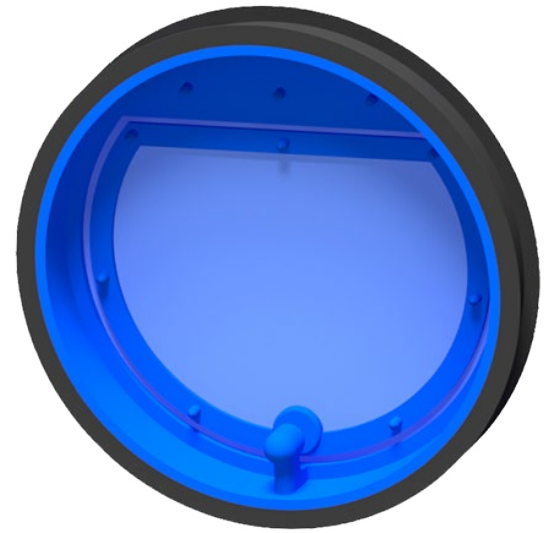


Insert the damper in the ventilation pipe. The circumferential seal must fit tightly to the duct. Horizontal and vertical installation possible. It is necessary to pay attention to the correct air flow direction.

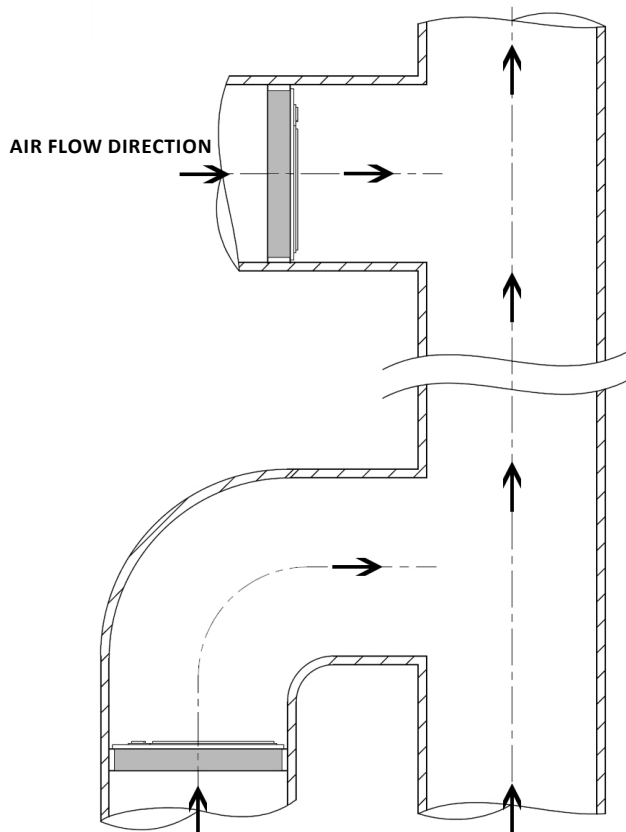

CORRECT




WRONG

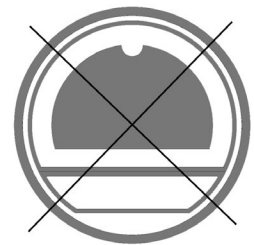


WRONG

Correct installation in the duct

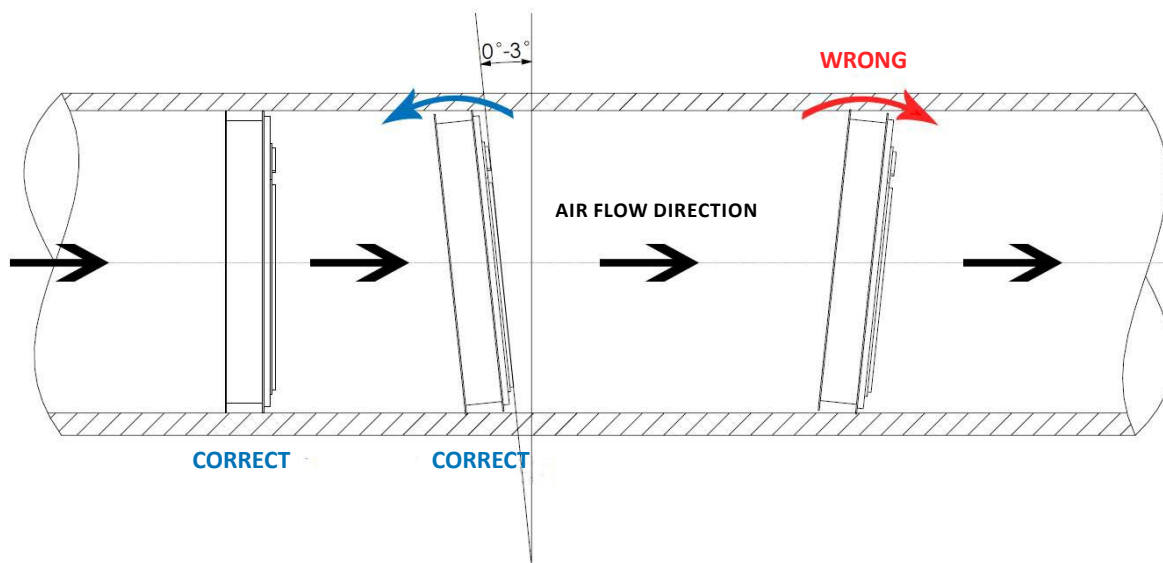

Leave enough free space (B) behind the backdraught damper so that the valve can open freely.

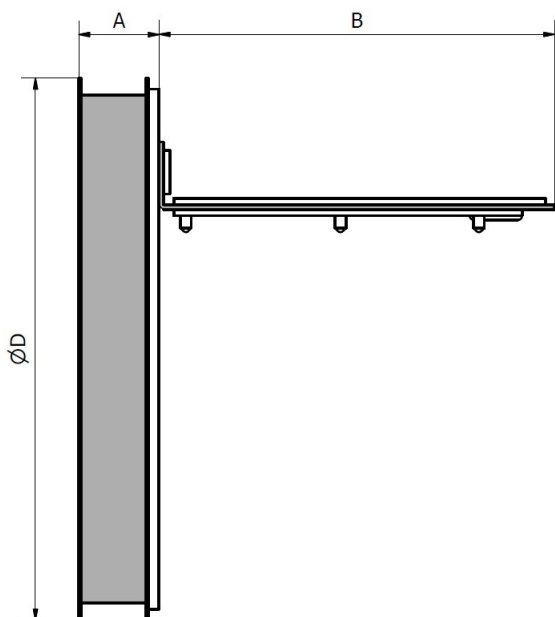

Dimensions

Typ	ØD	A	B
BLU.100	100	18	68
BLU.125	125	18	84
BLU.160	160	20	110